



1/6

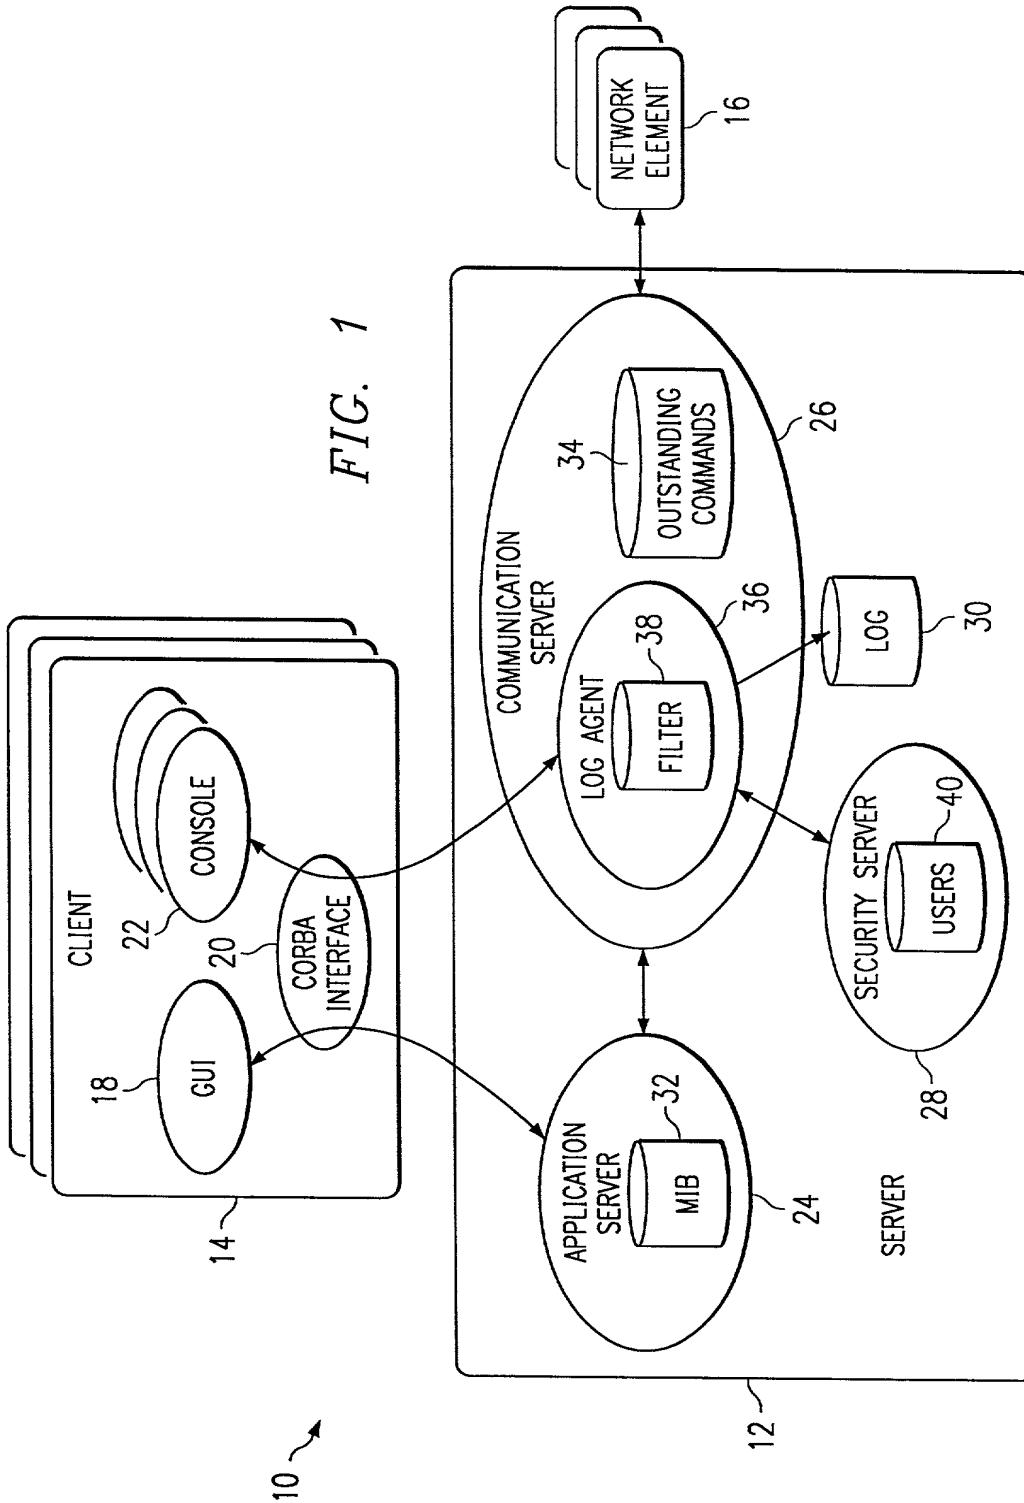

2/6

22

FIG. 2

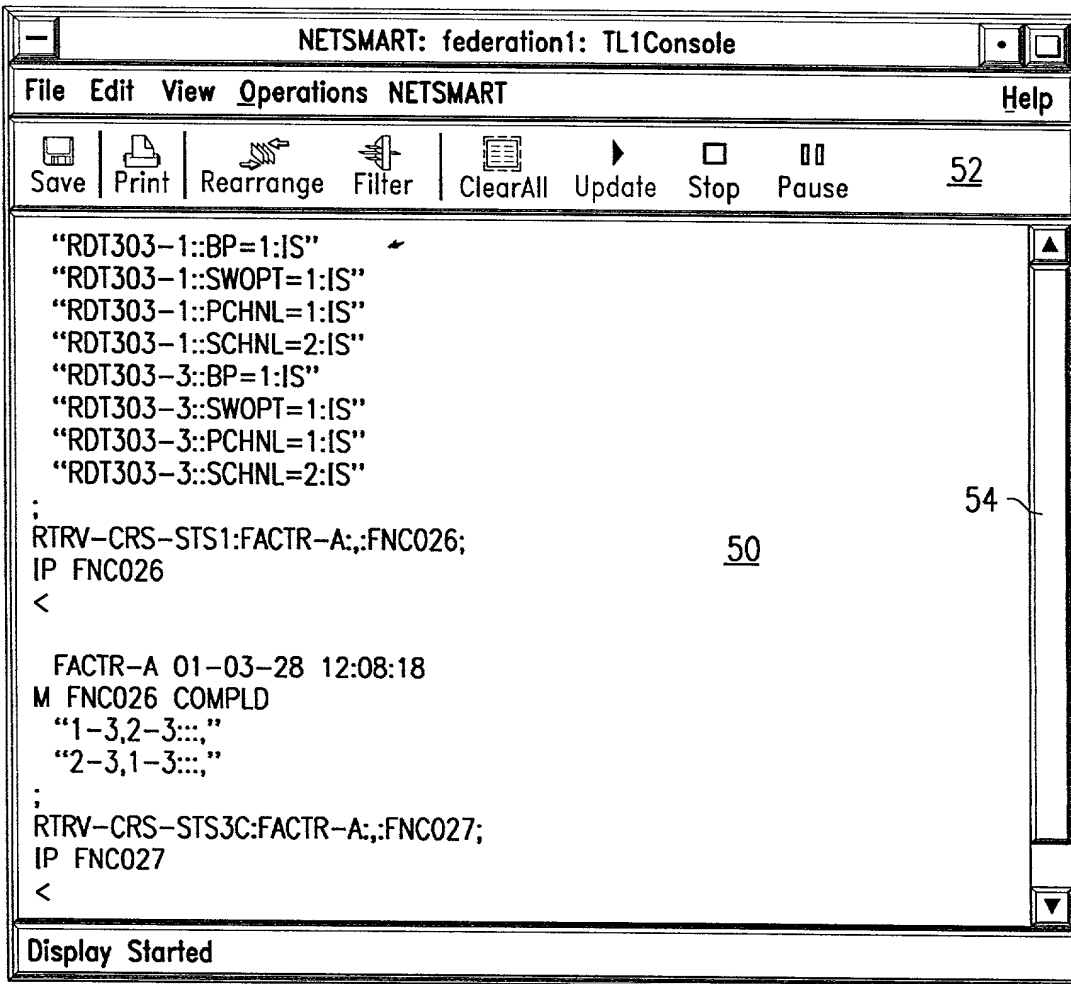

3/6

60

FIG. 3

A dialog box titled "Filter TL1Event". It contains a "Find NE ID" section with a dropdown menu set to "Starts With", a text input field containing "64", and a checked checkbox for "Case Sensitive". Below this is an "Event Types" section with a grid of checkboxes: "Unparsed", "Received Raw", "Response", "Send Raw", "Command", "Autonomous", and "Acknowledgement", all of which are checked. At the bottom are buttons for "OK", "Cancel", "Select All", "Clear All", and "Help".


70

FIG. 4


A dialog box titled "TL1 Console Rearrange Attributes". It features two lists: "Attribute List" (containing Parsable, TL1Type, UserName, TimeStamp, MsgID, NEID) and "Selected List" (containing TL1Msg). Between the lists are buttons for "Add", "Add All", "Remove", and "Remove All". To the right of the "Selected List" are "Go Up" and "Go Down" buttons. At the bottom are "OK", "Cancel", and "Help" buttons.

4/6

FIG. 5

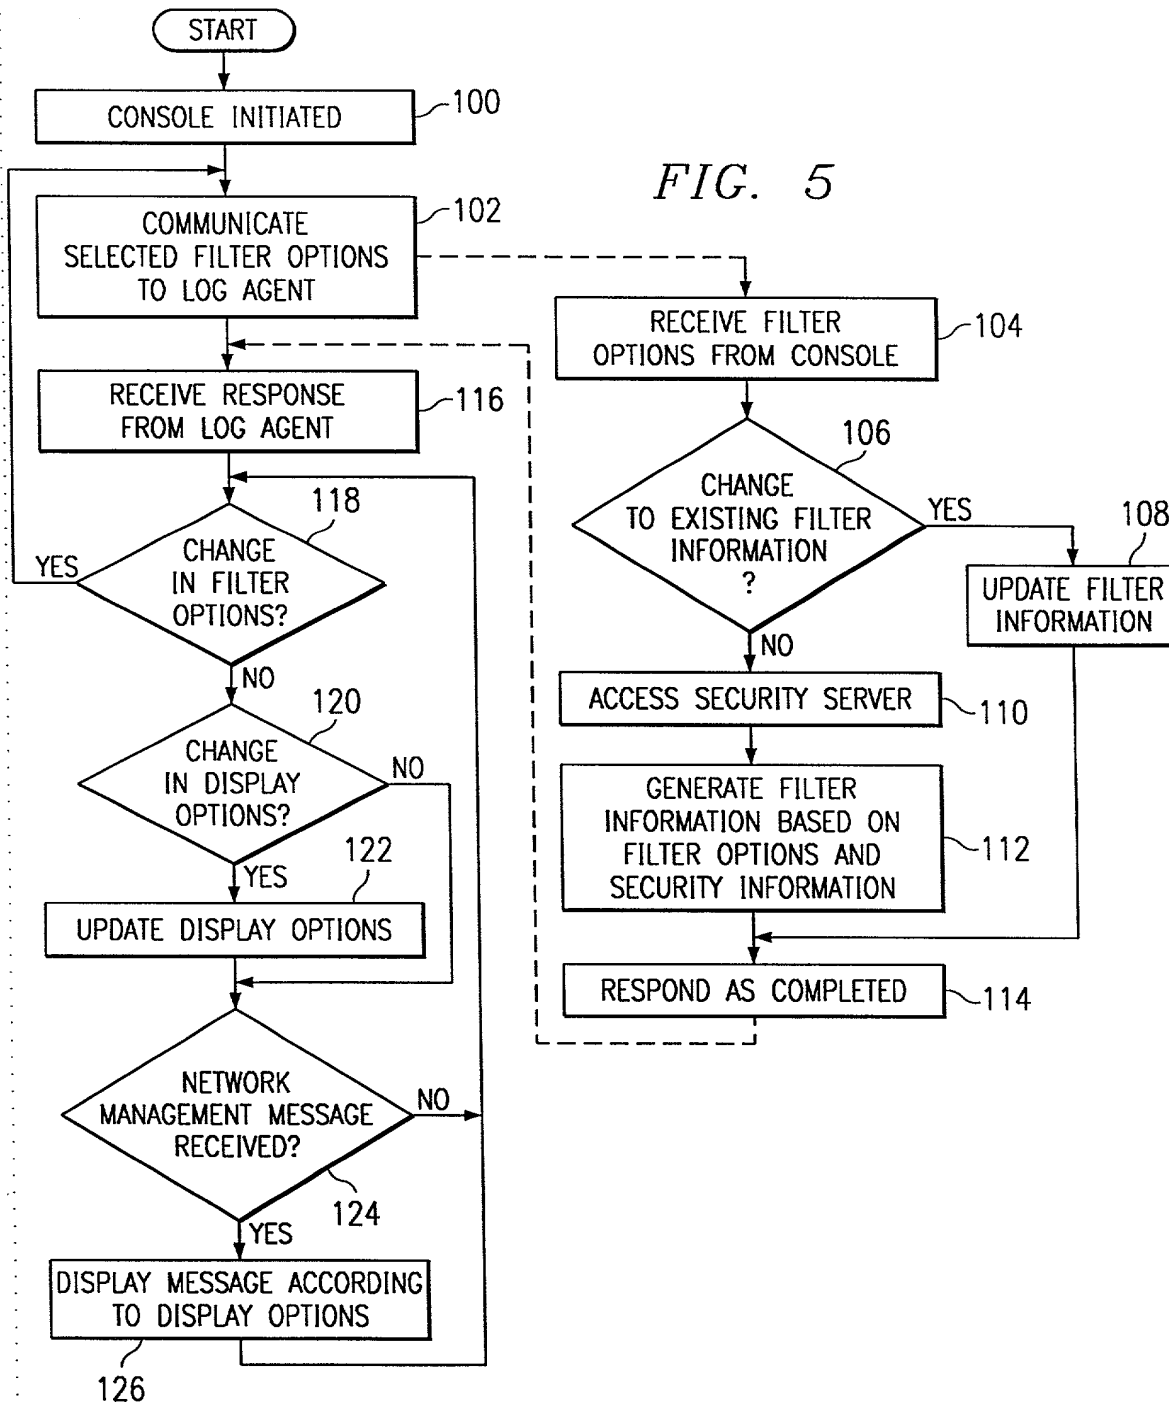

5/6

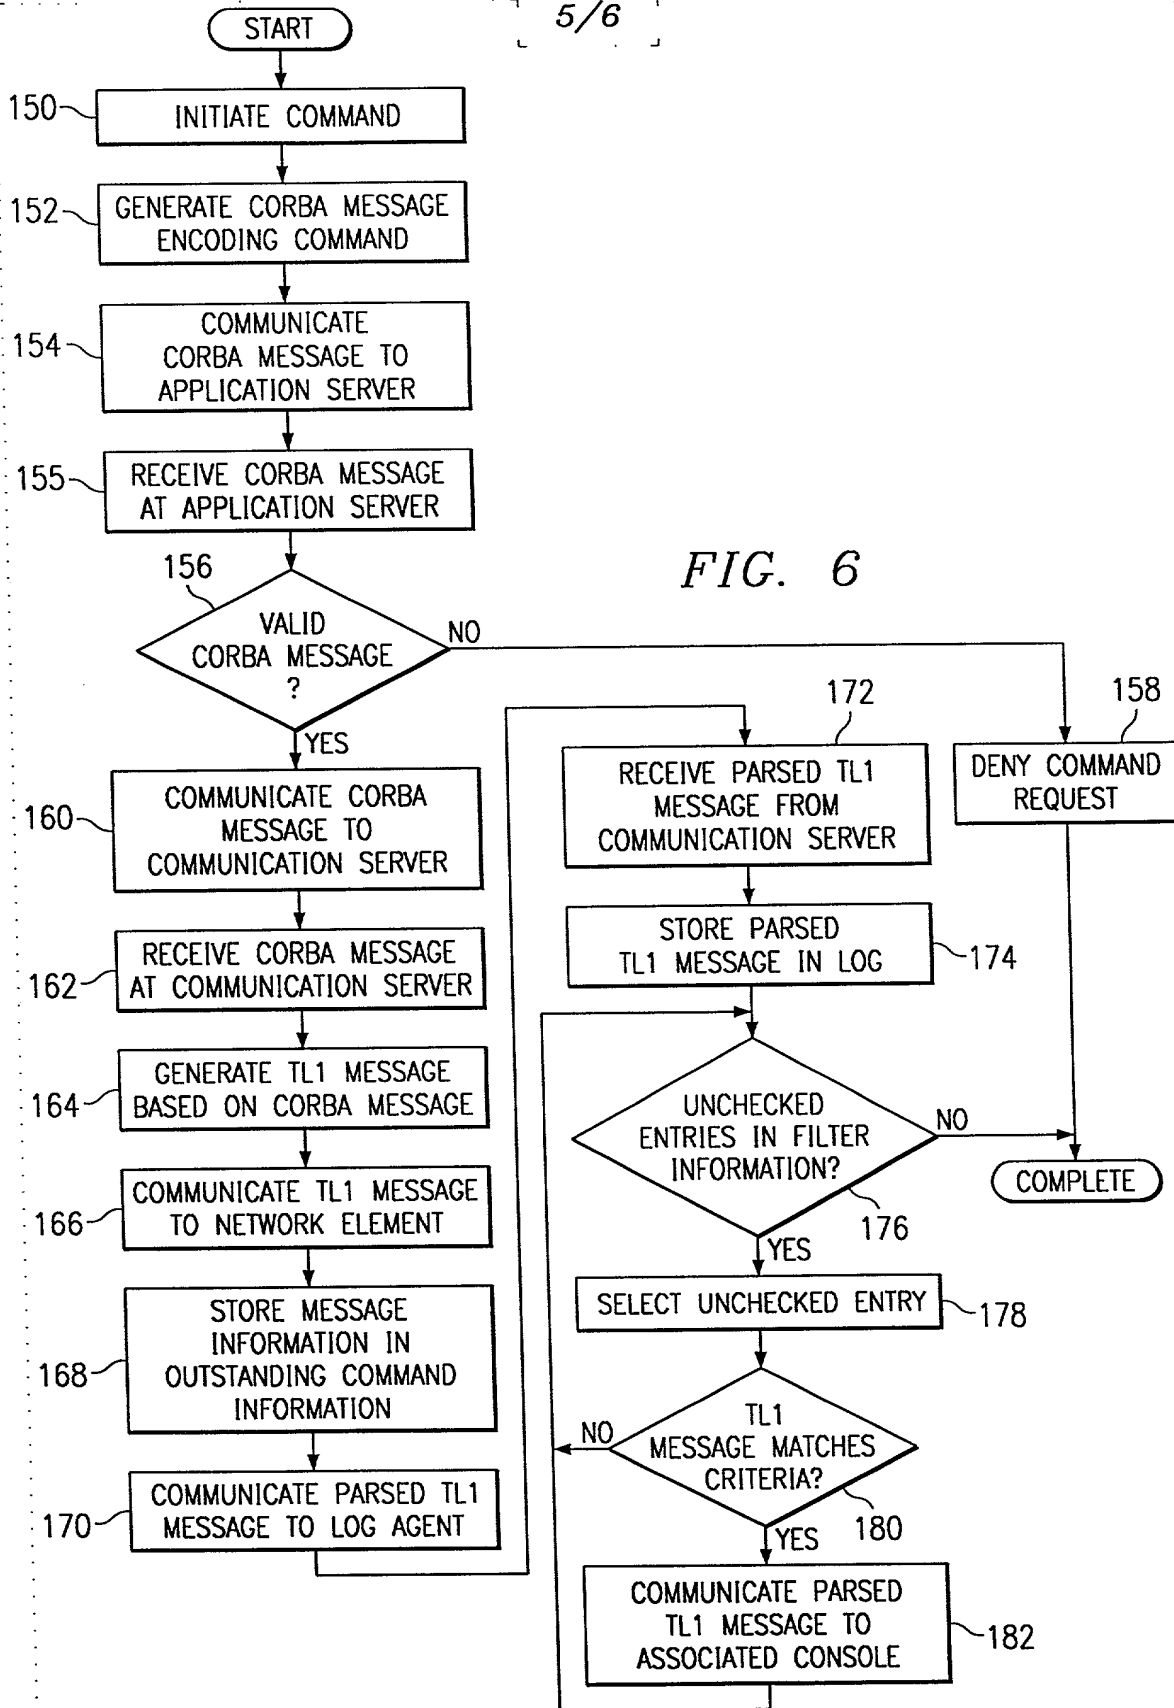

6/6

